

LCM-190T 19" TFT LCD Monitor with Touch-screen

LCM-190T-10N 19" super high brightness sun light 1000nits LCD monitor



Rugged steel construction



TOUCH CABLE



VGA CABLE



AUDIO CABLE




POWER ADAPTER



I / O Ports



**LED
OSD control buttons**

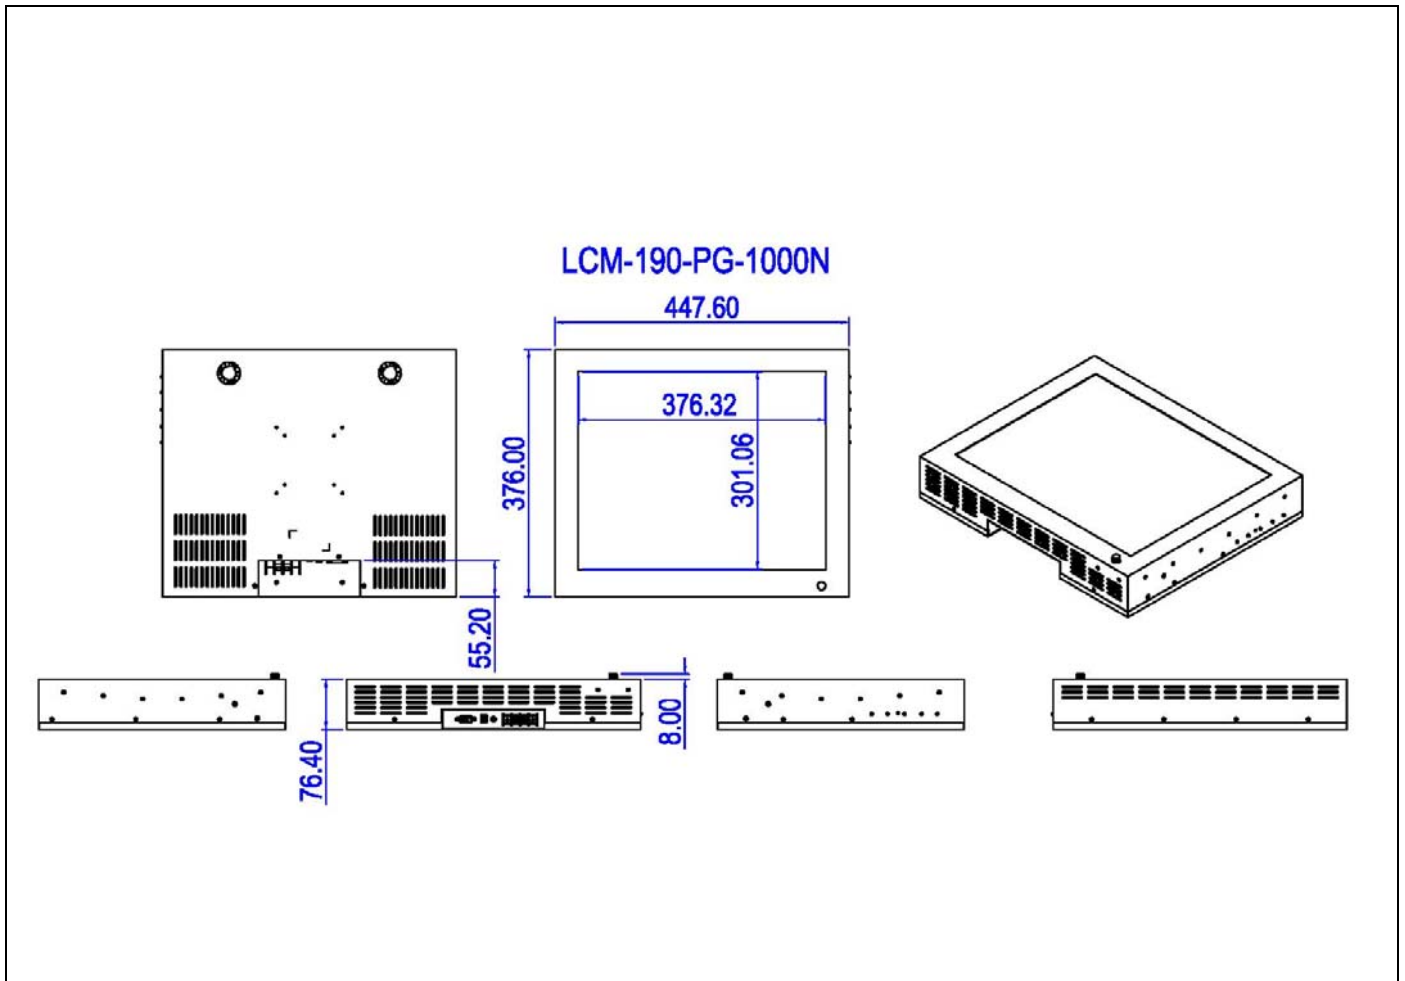

LCD Display size
19" TFT LCD color display

LCD Resolution
19" : 1280 x 1024 resolution

Brightness of LCD (Luminance)
19" : 300 cd/m2 high brightness

LCM-190T-10N : (Optional)

1000nits super high brightness sun light readable display

Number of Colors :

16.77 millions colors.

View Angle :

Left and right : 130 degree;
Up and down : 120

Pixel Pitch :

0.264 x 0.264 mm

Life of lamp tubes :

40,000 hours

Front Bezel (for panel-mount purpose)

10mm ultra-thick Aluminum front bezel for panel-mount also for good looking purpose.

Housing (enclosure) :

Made from ultra rigid 1.6mm thick steel construction with electro galvanized anti-rust surface treatment.

Color of housing :

Silver or Black colors for your selection

Touch Screen : (optional)

6-wire analog resistive touch screen,
4096 x 4096 resolution,

Wall-mount standard

Compliant to VESA-75 and VESA-100 universal industrial wall mount standard. Extra 4 hook holes are also provided for easy convenient wall mounting.

VGA port :

Standard universal 15-pin D-sub VGA port.

OSD control buttons :

On-Screen-Display buttons and Power switch button are located at the rear side. This OSD buttons can control screen position Up, Down, Left, Right, Brightness, Contrast ratio, menu, power switch.

Operating Temperature :

0 - 60 degrees C

Vibration Resistance

Meet industrial and military vibration test standards. IEC-60068 standard. 5 jV 500 Hz at 2G random vibration life test under Windows XP operation.

Shock Resistance

Meet industrial and military shock test standards. IEC-60068 shock life test at 20G acceleration for 11 msec duration under Windows XP operation

Power Supply :

Universal 100 – 240V AC power supply

Dimension : see the above drawing.

Order information :