


# PPC-1598T-AL

## 15" Rugged Industrial Fanless Panel PC

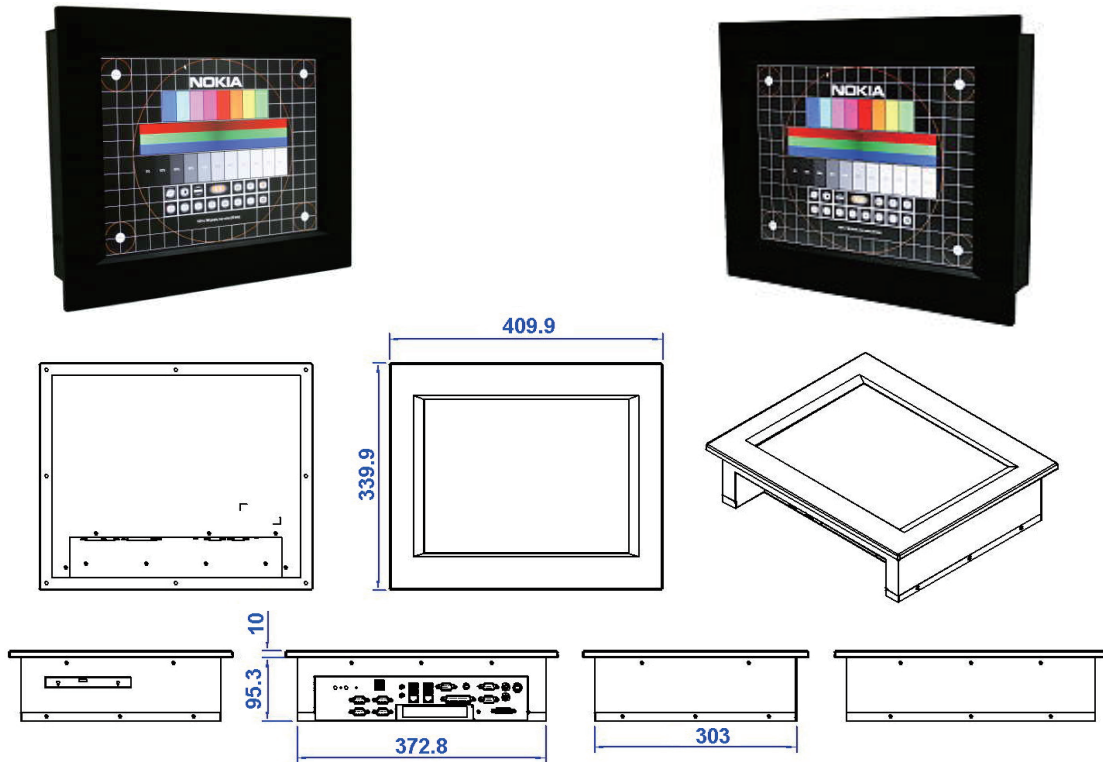

### Technical Specifications

#### LCD Display Grade

LCD Size	15" Active Matrix TFT LCD
Resolution	1024 x 768 resolution
Aspect Ratio	4 : 3 standard ratio
Luminance	350~500 cd/m2 (Option : 800~1000 cd/m2)
Color Depth	16.7 Million colors
View Angle	80(L) / 80(R) / 75(U) / 75(D) degree
Contrast Ratio	500 : 1 (typical)
Backlight life	50,000 Hours at 25°C ambient temperature

#### Touch Screen

Touch Screen	15" long life 5-Wire Resistive Touch
Resolution	4096 x 4096 ultra high resolution

#### Mainboard

CPU	Intel Ultra Low Voltage fanless Atom 1.6GHz CPU
System Memory	512KB, (Option : 1G, 2GB) DDR2 SO-DIMM
Storage Device	80GB (option : 160G, 320G, 500G anti-shock HD)

#### Chipset

System Chipset	Intel GSE945 and ICH7M
----------------	------------------------

#### I/O Interface

VGA	15-Pin female D-Sub VGA port
Graphics Chip	Intel GMA 950
Video RAM	224MB Video share RAM
COM (Serial)	4 COM Ports
RS422 / 485	Support 1 RS422 / 485
USB Port	6 USB2.0 Ports (max. 8 USB Ports)
PS2 Keyboard	1 PS2 Port for Keyboard interface
PS2 Mouse	1 PS2 Port for Mouse interface
Audio In-Out Port	Audio-in and Audio-out Ports

#### Expansion Slot

PCI Slot	Optional : 1 x PCI slot
Mini PCI-e slot	1 Mini PCI-e slot
CF Slot	1 Compact Flash slot
SATA Slot	2 x SATA slot for second storage device

#### Mechanical

Front Bezel	Solid aluminum front bezel
Construction	Heavy-duty rugged steel construction
Standard Color	Black color

#### Mounting Method

Wall-Mount	Support VESA-75 wall mount standard
Wall Mount Kit	VESA wall mount Kit is available at extra cost

#### IP-65 Rating

Front Side	IP-65 Water-proof at the front side
Back / Bottom	IP-54
6-Side Water-Proof	Yes, available at extra cost

#### Environmental

Operat Temperature	Meet MIL-STD-810F, 0°C to +60°C
Storage Temperature	Meet MIL-STD-810F, -20°C ~ +80°C
Shock	Meet MIL-STD-810F standard
Vibration	Meet MIL-STD-810F standard
CE	Meet CE standard
FCC	Meet FCC standard
RoHS	Meet RoHS standard

#### Power Adapter

AC Power Source	External AC-DC adapter from 90 up to 264V
DC Power Source	Support DC 12V Power source
Option : DC24~28V	Optional DC18~32V is available at extra cost
Safety Approval	Power adapter is UL, cUL, TUV Approval

#### Ordering Information

PPC-8498T-AL	8.4" Industrial Panel PC with Touch
PPC-1098T-AL	10" Industrial Panel PC with Touch
PPC-1298T-AL	12" Industrial Panel PC with Touch
PPC-1598T-AL	15" Industrial Panel PC with Touch
PPC-1798T-AL	17" Industrial Panel PC with Touch
PPC-1998T-AL	19" Industrial Panel PC with Touch
PPC-2098T-AL	20" Industrial Panel PC with Touch
PPC-2298T-AL	22" Industrial Panel PC with Touch